

ROBUS®

DOWNLIGHTS

TAYLOR CCT4 LED DOWNLIGHT

7W 9W 10W CCT4




PRODUCT INFORMATION DOCUMENT

FEATURES

- Switch on the back of the fitting allows selection between 3,000K, 4,000K, 5,000K and 6,500K colour temperature.
- Offers IC-4 Thermal Insulation rating
- Dimming Compatible with most TRIAC dimmers (compatibility list available on the website)

CONSTRUCTION


- PA66 Nylon coated Aluminium housing
- Polycarbonate trim & Opal diffuser
- Steel Spring clips
- Prewired with 600mm flex and plug

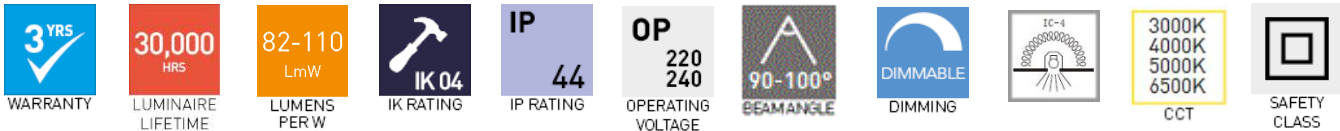

Product Code:	RC7WDL72CCT4	RC9WDL92CCT4	RC10WDL125CCT4
Comparable to:	50W halogen	50W halogen	100W GLS
Total Power (W):	7.3/7.1/7.1/7.2	7.3/7.1/7.2/7.3	10.1/9.5/9.7/9.8
Total Light Output (lm):	590/660/640/590	650/730/710/700	1,020/1,070/1,060/1,020
Illuminance at 1m (lux):	250/280/270/250	290/340/340/320	430/460/450/430
Beam Angle (deg):	100	90	100
CCT (K):	3,000/4,000/5,000/6,500	3,000/4,000/5,000/6,500	3,000/4,000/5,000/6,500
CRI (Ra):	80	80	80
Efficacy (lm / cctW):	82/94/91/82	90/105/103/95	102/113/110/104
Rated Life (hrs):	30,000	30,000	30,000
Warranty (yrs):	3	3	3
Ingress Protection (IP):	44	44	44
Operating Temperature (°C):	-20 ≤ Ta ≤ +40	-20 ≤ Ta ≤ +40	-20 ≤ Ta ≤ +40
Operating Voltage (Vac):	220-240	220-240	220-240
Power Factor (PF):	0.9	0.9	0.9
Diameter (mm):	90	108	136
Cut out (mm):	72	92	125
Depth (mm):	62	65	70
Projection (mm):	3	3	3
Box Qty:	1	1	1
Weight (kg):	0.21	0.28	0.31

Accessories:

- RC7TRIM-xx Trim for 7W Taylor 04,13,15
- RC9TRIM-xx Trim for 9W Taylor 04,11,13,15
- RC10TRIM-xx Trim for 10W Taylor 04,13,15
- 04 BLACK
- 11 Matte White
- 13 Brushed Chrome
- 15 Silver

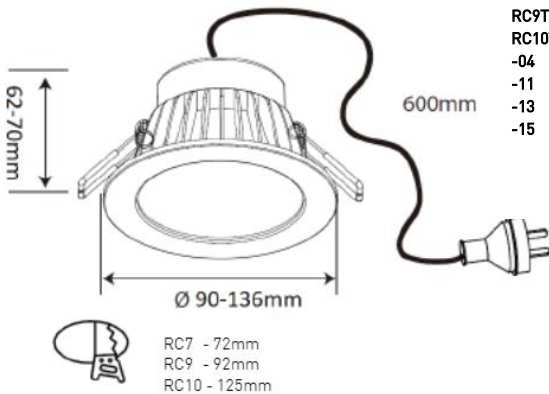

RC7 - 72mm
RC9 - 92mm
RC10 - 125mm

Product is certified to all the relevant standards.

Please contact our technical department for market specific compliances.

Cone Illuminance Diagram:

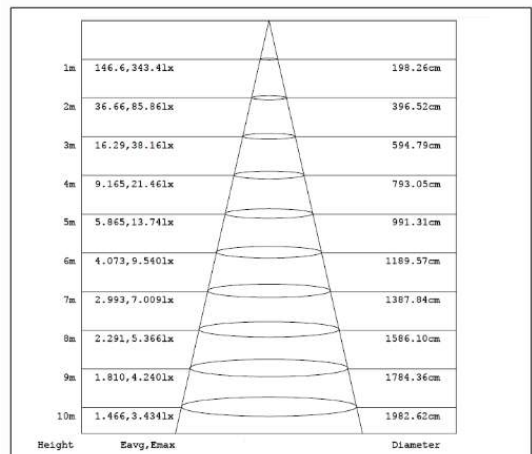


Diagram for RC9WDL92CCT4 in 4000K. Other diagrams available upon request

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

IRE: TEL: +353 1 709 9000
UK: TEL: 0800 973 220
AUS: TEL: +61 7 3890 5444
NZ: TEL: +64 03 668 5285

WEB: ROBUS.COM
WEB: ROBUS.COM
WEB: ROBUS.COM.AU
WEB: ROBUSED.CO.NZ

LED GROUP EUROPE · AUSTRALIA · NEW ZEALAND · ASIA · MIDDLE EAST · AFRICA