

Technical Data Sheet

WEISS™

FH708LED


ClearGlow 4 in 1

White Fascia

Dimensions

Cut-out size for outlet vent 155mm

Cut-out size for main body 161mm x 364mm

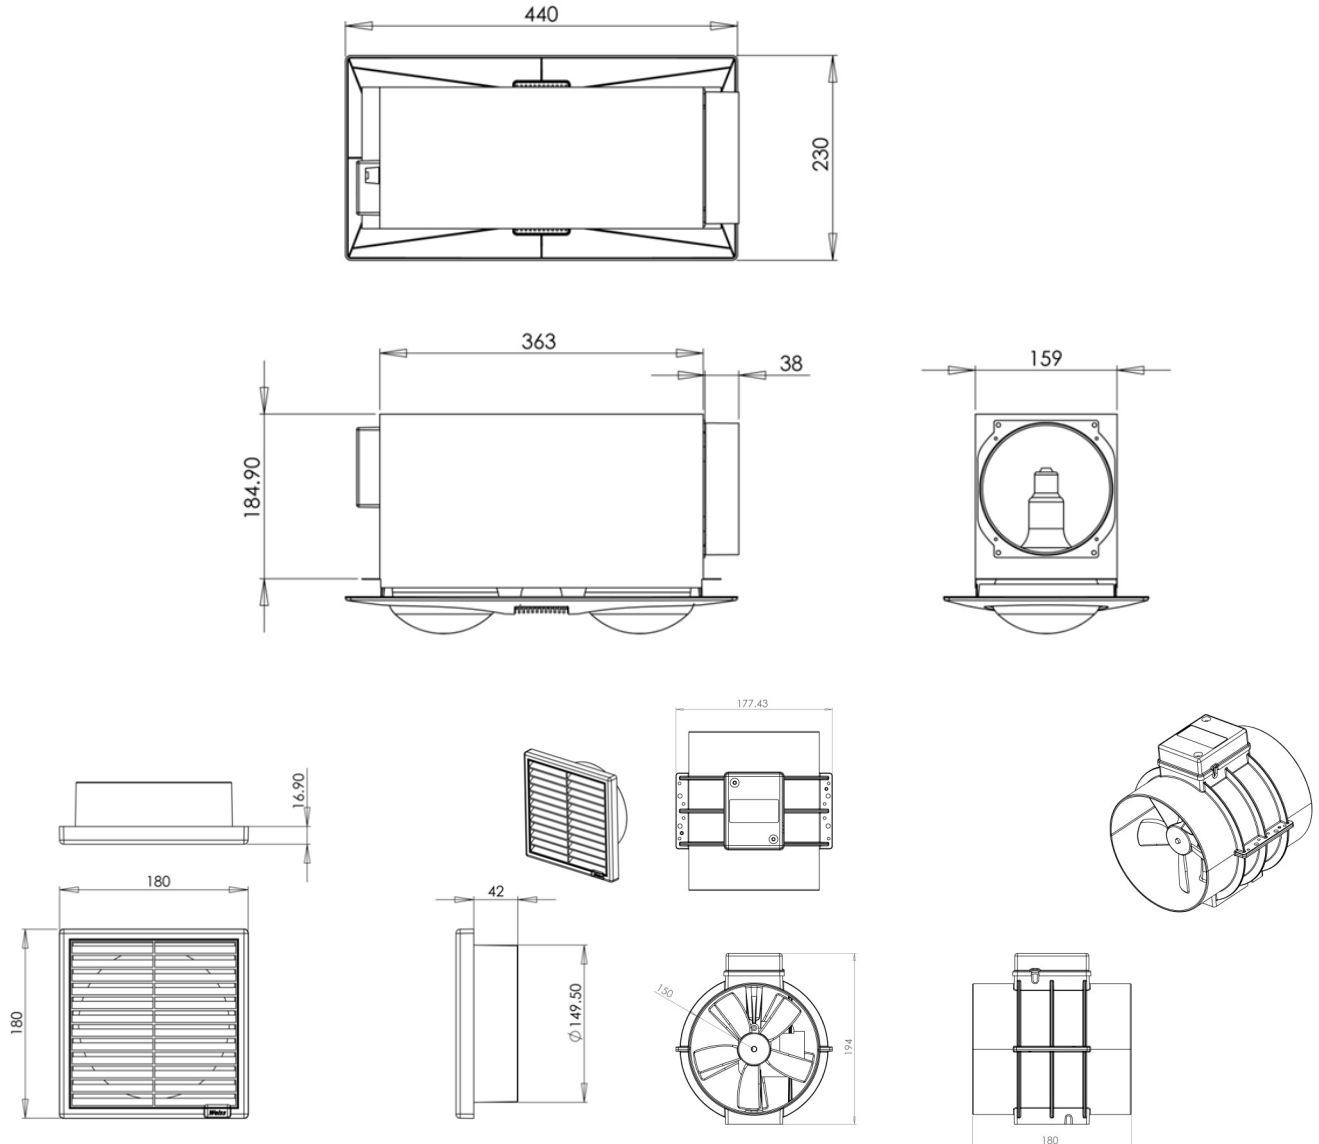

Specifications

Weight	4.6 Kg
Colour of front fascia	White
Housing material	Sheet Steel
Fascia material	Flame retardant ABS

Approval

Test standards	AS/NZS 603350.2.80: 2004 Amdts 1 and 1:2011 Amdt.1
Test Report no	5772

Features

- Easy to install
- Powerful, yet quiet fan motor due to ceiling cavity installation
- 3 meters of 150mm diameter ducting included
- Rugged steel body
- 2 x 275 watt heat globes
- 1 x 5 watt LED light
- 3 way wall switch
- All parts are included
- 3 year extended warranty

Technical Data Sheet

Product Use

The FH708LED is used for the lighting and extraction of mist

Typical applications:

- Bathrooms

Environmental Conditions

Operation	to IEC 721-3-3
Climatic conditions	class 3K5
Temperature	0...+50°C
Humidity	<95% r.h.

Standards

Test standards	AS/NZS 603350.2.80: 2004 Amdts 1 and 1:2011 Amdt.1 5772
Test Report no EMC Compliance	This is a Level One product with an C frame motor that has a very low risk of causing EMC Interference

General

Powerful inline fan with ducting extracts mist that can cause mould and dampness and expels it outside your home

Free air fan performance	420m ³ /hr 116.0L/sec
Installed Decibel rating	45 DB
Ceiling Insulation clearance	150mm from steel body on all sides, no insulation to cover body

Ordering

When ordering please give name and type,	
Reference	FH708LED
Barcode	942000490254-3

Technical Data

Power Supply	230 VAC
Power consumption	max. 3 Amps
Supply Line fusing	max. 10A
Connection terminals	screw clamp terminals
For solid wires	2 x 1.5mm ²
Motor	230-240VAC 50Hz 0,4Amp
Motor insulation class	B1
Total motor wattage	40 Watts
Motor protection	Thermally protected