


# THERMOLOGIKA

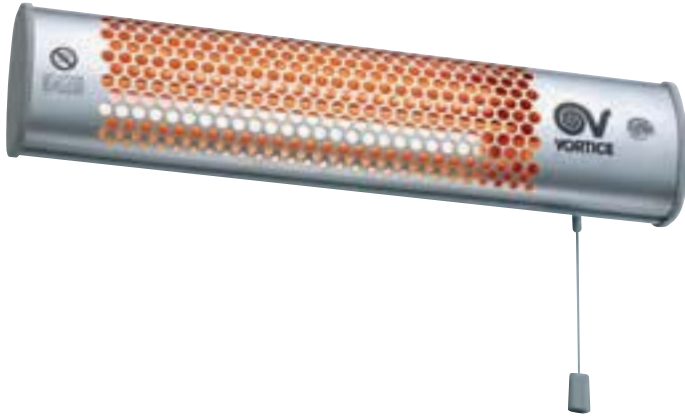

## INFRARED WALL HEATER FOR AUXILIARY HEATING


### Product specifications:

- IPX4 splashproof protection, can be installed in rooms with high relative humidity.
- Heat Up Time: approximately 30 sec.
- Choice of 3 power outputs: 600/1200/1800 W with a pull switch, the power output appears automatically.
- Can be adjusted (22° range) to direct the heat where needed.
- Can be switched on and off remotely.
- Acts instantly, even in cold rooms.
- Quartz bulb.




### KEY FEATURES

- Suitable for domestic and commercial applications. ideal when instant heat is necessary or in places in direct and continuous contact with the outside.
- It heats by radiation, the heat spreads directly at the speed of light straight to the solid bodies with the same principle as solar radiation.
- Wall installation with compact dimensions.
- Maximum silence: it has no moving parts.
- Easy installation



## DIMENSIONS

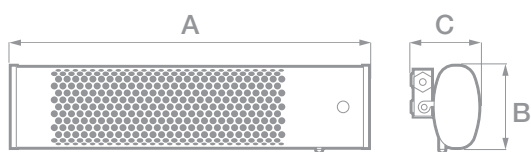

Model	Code	A	B	C	Kg
THERMOLOGIKA	70002	540	123	100	1.6

Dimensions (mm)

## TECHNICAL DATA

MODEL	Code	V	Hz	Power Setting W	A	Insulation	IP
THERMOLOGIKA	70002	230	50	600/1200/1800	7.8	 cl.I	X4

## ACCESSORIES

MODEL	Code
QUARTZ BULB	22985

## APPLICATIONS

