


Product data sheet

Characteristics

PDLO394CS-XW

Switched socket outlet, PDL Iconic Outdoor, Single with timer, 10 A, 250 V, Extra white

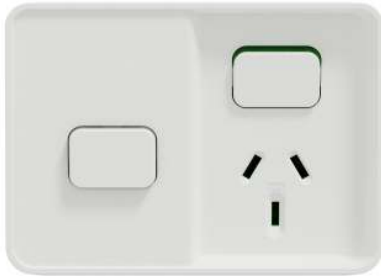

Main

Range	PDL Iconic
Product or component type	Switched socket
Device presentation	Complete product
Product brand	PDL
Technology type	Bluetooth low energy Zigbee
Memory description	Backup memory Backup memory
Memory usage	For data and the program Program
Switch application	On/off switching
Software name	Wiser by SE App
Outlet standard	Australian

Complementary

Device mounting	Wall mounted
Number of power socket outlets	1
Number of rocker	1
Range compatibility	Iconic
Number of gangs	1 gang
Pin number	3
Colour	White (XW)
Surface finish	Matt
Type of packing	Box
Rated current	10 A at 250 V AC 50 Hz
Electrical durability	12000 cycles
Connections - terminals	3 screw terminals
Screwdriver shape	Square drive no 1 (SQ1) Philips No 2
Clamping connection capacity	3 x 2.5 mm ² 2 x 4 mm ²
Wire stripping length	16 mm
Material	PC (polycarbonate)
Type of installation	Outdoor
Height	85 mm
Width	115.5 mm
Depth	82 mm
Net weight	0.19 kg

Environment

Ambient air temperature for operation	0...45 °C
Relative humidity	10...95 %
Standards	AS/NZS 3112
Product certifications	RCM

Offer Sustainability

REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
Halogen content performance	Halogen free plastic parts product