

JUMBO LED EXIT



Jumbo Exit for Larger Viewing Distances

The Jumbo LED Exit caters for 40m viewing distance applications by using a 250mm high pictograph.

Featuring a robust steel housing with slide in diffusers and back plates for single and double sided configurations, the Jumbo LED Exit is easy to install as a wall or ceiling mounted exit.



Applications

- | | |
|---|--|
|  Warehouses |  Stadiums |
|  Factories |  Halls |
|  Car Parks |  Train Stations |

Features and Benefits

- AS/NZS 2293.3 compliant
- Wall and ceiling mount
- All directional decals in one box
- Lithium Iron Phosphate or Nanophosphate® battery
- Clevertest Plus System compatible



JUMBO LED EXIT

| ORDERING INFORMATION | | EL | LP | L10 |
|--------------------------|-----------------------------------|---|----------------|----------------|
| PART NO. | Standard | EJELED-40-LI | CJELED-40 | LJELED-40 |
| | Clevertest Plus System compatible | No | Yes | Yes |
| | DALI | - | CJELED-40-DALI | LJELED-40-DALI |
| | Zoneworks® XT Hive | - | CJELED-40-HV | LJELED-40-HV |
| Carton Quantity | | 1 | | |
| Weight - single (carton) | | 7.3kg | | |
| Dimensions (L x W x H) | | 630mm x 100mm x 320mm | | |
| Directional Options | | All directional inserts included in the box | | |

| POWER, LAMPS AND BATTERY | EL | LP | L10 |
|-----------------------------------|--|------------------|------------------------|
| Power Consumption (Standby / Max) | 5.3W / 6.5W | 3.2W / 5.6W | |
| Lamp(s) | 50,000 Hour LED | 100,000 Hour LED | |
| Battery type | Lithium Iron Phosphate | | Lithium Nanophosphate® |
| Voltage (V) / Capacity (mAh) | 3.2V / 3000mAh | 3.2V / 3200mAh | 3.3V / 2500mAh |
| Charging Method | Intelligent Current Limited Constant Voltage | | |

| TECHNICAL SPECIFICATIONS | |
|--------------------------------|--|
| Operating Mode | Maintained |
| Voltage (V) (Frequency (Hz)) | 220-240V (50Hz) |
| Construction - Body / Diffuser | Powder Coated Metal / Acrylic |
| Viewing Distance | 40m |
| Mounting Type | Wall and Ceiling Single and Double Sided |
| Operating Temperature | 1°C to 40°C |
| Ingress Protection Rating (IP) | IP20 (IP66/67 Version Available) |

| SPARE PARTS | EL | LP | L10 |
|-------------------------|--------------|--------------|--------------|
| Battery | 1560156 | 1550010 | 1530010 |
| Lamp Bar | 8003055 | 8002470 | 8002470 |
| DALI Node | N/A | 8003060 | 8003060 |
| Zoneworks® XT Hive Node | N/A | 8003190 | 8003190 |
| Diffuser | PJED-R-SLIDE | PJED-R-SLIDE | PJED-R-SLIDE |


| CLASSIFICATION | EL | LP | L10 |
|----------------|------|------|------|
| Co | D6.3 | D6.3 | D6.3 |
| C90 | E3.2 | E3.2 | E3.2 |

| SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX) | | | | | | | | | |
|--|------|------|------|------|------|------|------|------|------|
| Classification | 2.1m | 2.4m | 2.7m | 3.0m | 3.3m | 3.6m | 4.0m | 4.5m | 5.0m |
| D6.3 | 8.5 | 8.8 | 8.9 | 9.1 | 9.1 | 9.2 | 9.1 | 9 | 8.7 |
| E3.2 | 5.8 | 6.1 | 6.4 | 6.5 | 6.6 | 6.6 | 6.4 | 0.0 | 0.0 |

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit:
<https://clevertronics.com.au/spacing-tables/>

Based on minimum light level of 0.2 lux. Maximum allowed mounting height is 2.7m but for exceptions see AS/NZS 2293.1. Spacing classifications do not apply for theatre versions.

*Warranty information located at:
<https://clevertronics.com.au/warranty-statement/>

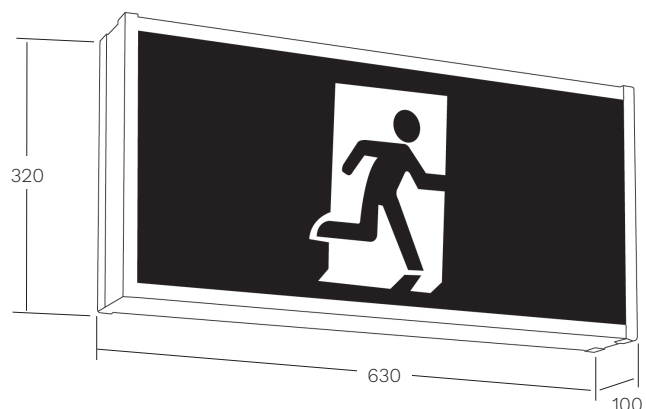

Dimensions (mm)

clevertronics.co.nz
clevertronics.com.au

195 Chesterville Road, Moorabbin VIC 3189
P +61 3 9559 2700 F +61 3 9559 2799 E info@clevertronics.com.au

Clevertronics is committed to continuously improving its products. All features and specifications are subject to change without prior notice. CT-BRO-ANZ-JUMBO-EX-002

