

PHOENIX

BI COLOUR LED BATTEN

GBT501 BC



FEATURES

- Pressed steel housing
- Powder coated finish
- Opal polycarbonate LED diffuser
- Constant current LED driver fitted
- Multiple cable entrance position
- Select colour temperature (4000K, 5700K) with DIP switch
- LED lifespan: 50000Hrs, L70, Ta 25°C
- Ta: -20 to +40°C



EMERGENCY


- Intelligent automatic recharging function
- Constant current mode
- 3 hour emergency operation
- Over discharge protection
- LED charge status display
- Test switch with self-test function
- Ta: 0 to +40°C

TECHNICAL SPECIFICATIONS


MODEL NO.	INPUT VOLTAGE (V)	POWER (W)	LUMEN (lm)	COLOUR TEMPERATURE (K)	BEAM ANGLE (°)	DIMENSIONS (LxWxH) (mm)	FITTING COLOUR	CARTON QUANTITY
GBT501/120 BC	230	40	4000	4000/5700	120	1200 x 65 x 70	White	6
GBT501/150 BC	230	60	6000	4000/5700	120	1500 x 65 x 70	White	6
GBT501/120 BC EM	230	40 (2.3)*	4000 (340)*	4000/5700	120	1200 x 65 x 70	White	6
GBT501/150 BC EM	230	60 (2.3)*	6000 (340)*	4000/5700	120	1500 x 65 x 70	White	6

*When running on EM backup Wattage is 2.3w & Lumen 340lm

Select colour temperature with DIP switch

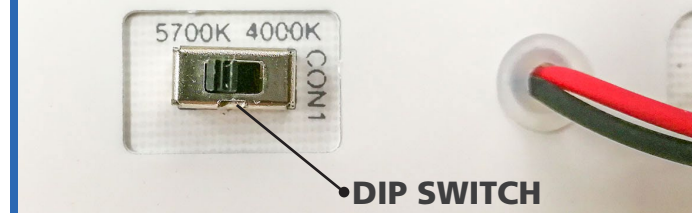


DIMENSION



TECHNICAL DATA

Rated supply voltage	230V~	Recharge hours	16h
Frequency	50/60Hz	EM LED power LED	2.3W
Input power	3.5W	Battery type	LiFePO4 3.2V 3.3Ah

CLASSIFICATION: C0: D50, C90:D32 (120) / C0: D40, C90:D32 (150)

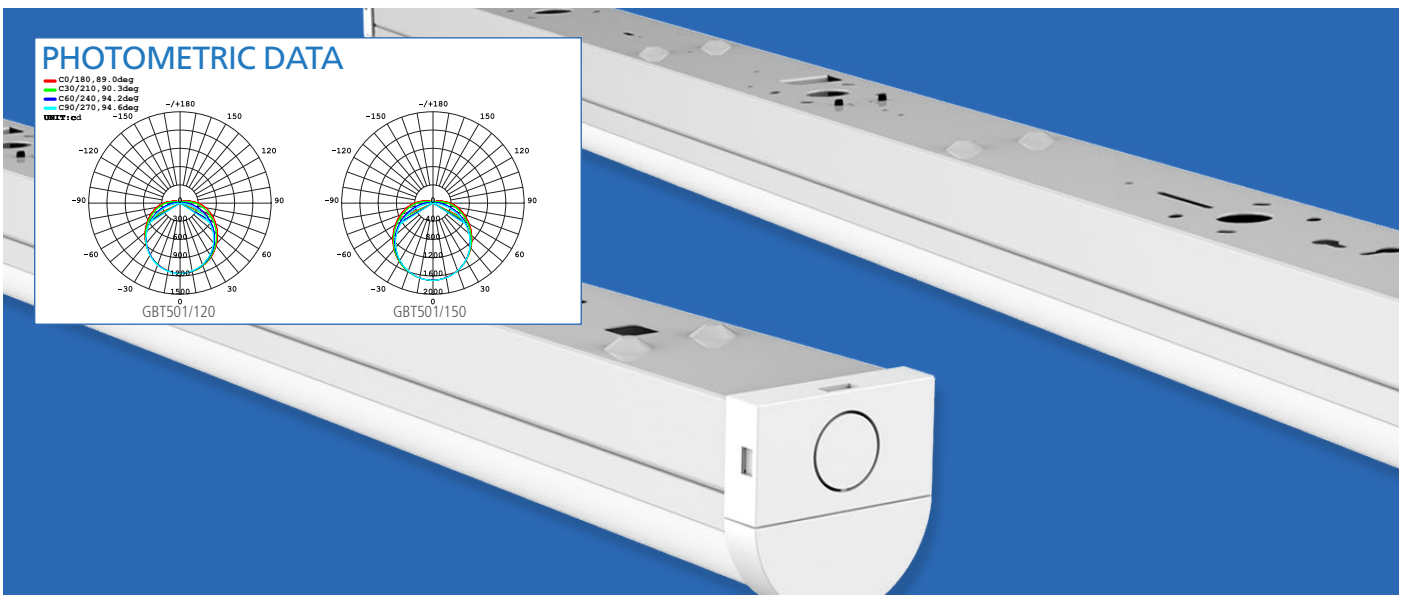

Specifications above are for reference only and may vary without prior notice