

LIFELIGHT PRO SURFACE MOUNT




Premium LED Emergency Light

The Lifelight Pro is an energy efficient, lithium powered LED emergency light in a small and sleek architectural design. The D63 classification of the Lifelight Pro provides an amazing 60% increase in emergency lighting coverage compared to many existing emergency lights on the market.

Suitable in a variety of applications the Lifelight Pro will provide outstanding performance and too many will reduce installation and maintenance costs.



Applications

- | | |
|---|--|
|  Office Buildings |  Showrooms |
|  Galleries |  Retail Outlets |
|  Apartments |  Theatres |

Features and Benefits

- AS/NZS 2293.3 compliant
- D63 classification
- Low 0.4W power consumption
- Lithium Iron Phosphate or Nanophosphate® battery
- Clevertest Plus System compatible
- White or Black (other colours on request)
- Square or cylinder case



LIFELIGHT PRO SURFACE MOUNT

ORDERING INFORMATION		LP		L10	
PART NO.	Standard - White	CLIFE-PRO-SMC	CLIFE-PRO-SMS	LLIFE-PRO-SMC	LLIFE-PRO-SMS
	Standard - Black	CLIFE-PRO-SMC-BLK	CLIFE-PRO-SMS-BLK	LLIFE-PRO-SMC-BLK	LLIFE-PRO-SMS-BLK
	Clevertest Plus System Compatible	Yes			
	DALI	CLIFE-PRO-SMC-DALI	CLIFE-PRO-SMS-DALI	LLIFE-PRO-SMC-DALI	LLIFE-PRO-SMS-DALI
	Zoneworks® XT Hive	CLIFE-PRO-SMC-HV	CLIFE-PRO-SMS-HV	LLIFE-PRO-SMC-HV	LLIFE-PRO-SMS-HV
Carton Quantity	1 piece	10 pieces	1 piece	10 pieces	
Weight - single (carton)	1.5kg	1.5kg (17kg)	1.5kg (17kg)	1.5kg (17kg)	
Dimensions (L x W x H)	128mm (D) x 252mm	267mm x 148mm x 60mm	128mm (D) x 252mm	267mm x 148mm x 60mm	

POWER, LAMPS AND BATTERY	LP	L10
Power Consumption (Standby / Max)	0.4W / 4.7W	
Lamp(s)	2 x LED	
Battery	Lithium Iron Phosphate	Lithium Nanophosphate®
Voltage (V) / Capacity (mAh)	3.2V / 6400mAh	3.3V / 5000mAh
Charging Method	Intelligent Current Limited Constant Voltage	

TECHNICAL SPECIFICATIONS	
Operating Mode	Non-Maintained
Voltage (V) Frequency (Hz)	220-240V (50Hz)
Operating Temperature	1°C to 40°C
IP Rating (IP)	IP20


SPARE PARTS	LP	L10
Battery	1550230	1530230
DALI Node	8003060	8003060
Zoneworks® XT Hive Node	8003190	8003190

CLASSIFICATION	LP	L10
C0	D63	D63
C90	D63	D63

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)														
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m	9.0m	10.0m
D63	11.5	13.2	14.8	16.5	18.1	19.8	22	24.5	25.2	26.4	27.3	28	28.5	28.8

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>

*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>

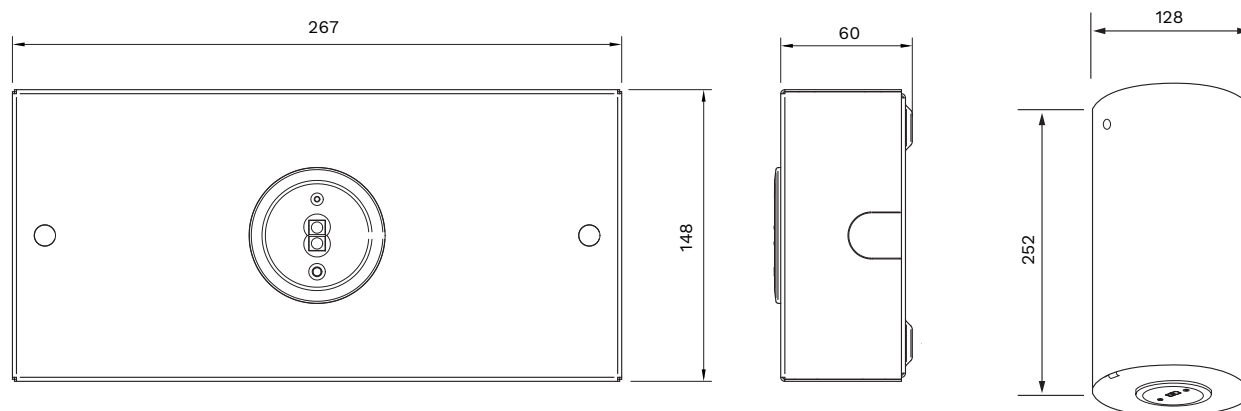

Dimensions (mm)

clevertronics.co.nz
clevertronics.com.au

195 Chesterville Road, Moorabbin VIC 3189
P +61 3 9559 2700 F +61 3 9559 2799 E info@clevertronics.com.au

Clevertronics is committed to continuously improving its products.
All features and specifications are subject to change without prior notice.
CT-BRO-ANZ-LIFELIGHTPRO-SM-EM-001

