


Product data sheet

Characteristics

SAU25036273

Acti9 Chassis - iC60 250A, 3Ph, 27mm, 36pole, Top Feed

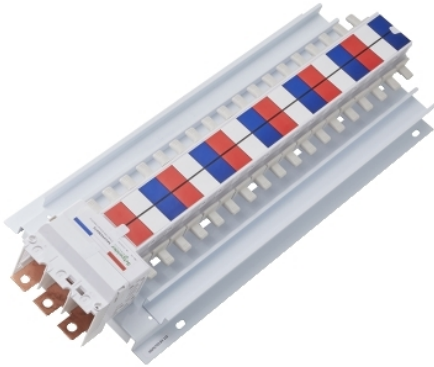

Main

Range	Acti 9
Product or component type	Chassis
Device application	Distribution

Complementary

Range compatibility	Distribution board
Network type	AC
[In] rated current	250 A
Short-circuit withstand	25 kA 0.1 s
Number of ways	1 way (incomer) - 3P
Number of poles	36 27 mm
Location of connection	Top
Length	488 mm
Width	215 mm
Busbar pitch	27 mm

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	3889.5 g
Package 1 Height	95 mm
Package 1 width	670 mm
Package 1 Length	250 mm

Offer Sustainability

REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.