Technical Data Sheet



FH24SS

Wall Mounted Fan Heater


Stainless Steel Finish





Dimensions


Length 269mm


Height 100mm









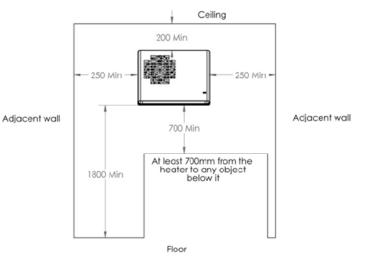

Specifications

Weight 1.96kg
Colour Stainless Steel
Housing material Stainless Steel,
Poly Carb

Approval

AS/NZS 60335.2.30:2009 Amdts 1:2010.

Features

- Easy to install
- Powerful fan motor
- All parts are included
- 2 year extended warranty

Technical Data Sheet

Product Use

The FH24SS is used to quickly heat the area

Typical applications:

Bathrooms

Environmental Conditions

Operation to IEC 721-3-3
Climatic conditions class 3K5
Temperature 0...+50°C
Humidity <95% r.h.

Standards

ERAC

Test standards A/S NZS

60335.2.30:2009 Amnds 1-2010.

000114

EMC Compliance This is a Level One

product with an C frame motor that has a very low risk of causing EMC Interference

Minimum Mounting Distances

When choosing a location for the heater the following minimum mounting distances must be observed:

At least 1800mm from the floor up to the heater At least 200mm from the heater to the ceiling At least 250mm from any adjacent walls

At least 700mm from the heater to any objects

below it

Ordering

When ordering please give name and type,

Reference FH24SS

Barcode 942000490193-5

Technical Data

Power Supply 230 VAC
Supply Line Fusing max. 10A
For Solid Wires 2 x 1.5mm²

Motor 230-240VAC 50Hz

0.3Amp

Motor Insulation Class B1

Motor Protection Impedance Protected Total Product Wattage 2200-2400Watts

Installed DB rating at 1.5m 45DB