


## Product data sheet

### Characteristics

# LA1KN11

Auxiliary contact block, TeSys K, 1NO + 1NC, front mounting, screw clamp terminals

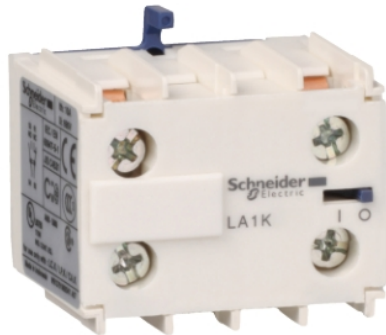

### Main

Range	TeSys
Product name	TeSys K
Product or component type	Auxiliary contact block
Device short name	LA1
Range compatibility	TeSys K LC1K TeSys K CA2K TeSys K CA3K TeSys K CA4K
Mounting location	Front
Pole contact composition	1 NO + 1 NC
Contacts operation	Instantaneous
[Ue] rated operational voltage	690 V AC 25...400 Hz
[Ie] rated operational current	6 A at 120 V AC-15 1.04 A at 690 V AC-15 0.55 A at 125 V DC-13 0.1 A at 600 V DC-13
[Ui] rated insulation voltage	690 V conforming to IEC 60947-5-1 600 V conforming to UL 60947-5-1 600 V conforming to CSA C22.2 No 60947-5-1
[Ith] conventional free air thermal current	10 A (at 50 °C)
Standards	EN/IEC 60947-5-1 UL 60947-5-1 CSA C22.2 No 60947-5-1 GB/T 14048.5
Product certifications	IECEE CB Scheme UL CSA CCC

### Complementary

Irms rated making capacity	110 A at <= 690 V AC conforming to IEC 60947
Permissible short-time rating	80 A 1 s 60 A 500 ms 110 A 100 ms
Associated fuse rating	10 A gG at <= 690 V conforming to IEC 60947
Minimum switching current	5 mA
Minimum switching voltage	17 V
Non overlap distance	0.5 mm
Insulation resistance	> 10 MOhm
Connections - terminals	Screw clamp terminals 1 cable(s) 0.34...1.5 mm <sup>2</sup> flexible with cable end Screw clamp terminals 1 cable(s) 0.75...4 mm <sup>2</sup> flexible without cable end Screw clamp terminals 1 cable(s) 1.5...4 mm <sup>2</sup> rigid Screw clamp terminals 2 cable(s) 0.34...1.5 mm <sup>2</sup> flexible with cable end Screw clamp terminals 2 cable(s) 0.75...4 mm <sup>2</sup> flexible without cable end Screw clamp terminals 2 cable(s) 1.5...4 mm <sup>2</sup> rigid
Tightening torque	1.3 N.m - with screwdriver Philips No 2
Height	30 mm
Width	38 mm

Depth	35 mm
Net weight	0.045 kg

## Environment

Environmental characteristic	Normal environment
IP degree of protection	IP20 conforming to IEC 60529
Protective treatment	TC conforming to IEC 60068
Ambient air temperature for storage	-50...80 °C
Ambient air temperature for operation	-25...50 °C
Operating altitude	2000 m

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	31.48 g
Package 1 Height	2.972 cm
Package 1 width	3.403 cm
Package 1 Length	3.895 cm

## Offer Sustainability

REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins